


ELECTRIC CONNECTION  
POWER INSTALLED 60 Kw  
3PHASE + EARTH

WATER CONNECTION :  
180 l/min. - 2.5 bar per min. -  
ATTACHMENT FOR FLEXIBLE PIPE øi 40 mm.

AIR CONNECTION :  
250 l/min. OF INTAKE AIR - 6-8 bar -  
ATTACHMENT FOR FLEXIBLE PIPE øi 20 mm.

THE MACHINE NEEDS ALMOST 300 Litres OF HYDRAULIC  
FLUID WITH THE FOLLOWING FEATURES :  
3°C-5°C ENGLER AT 50°C  
RECOMMENDED HYDRAULIC FLUIDS ARE :

AGIP OSO 32-46  
SHELL TELLUS 32-46

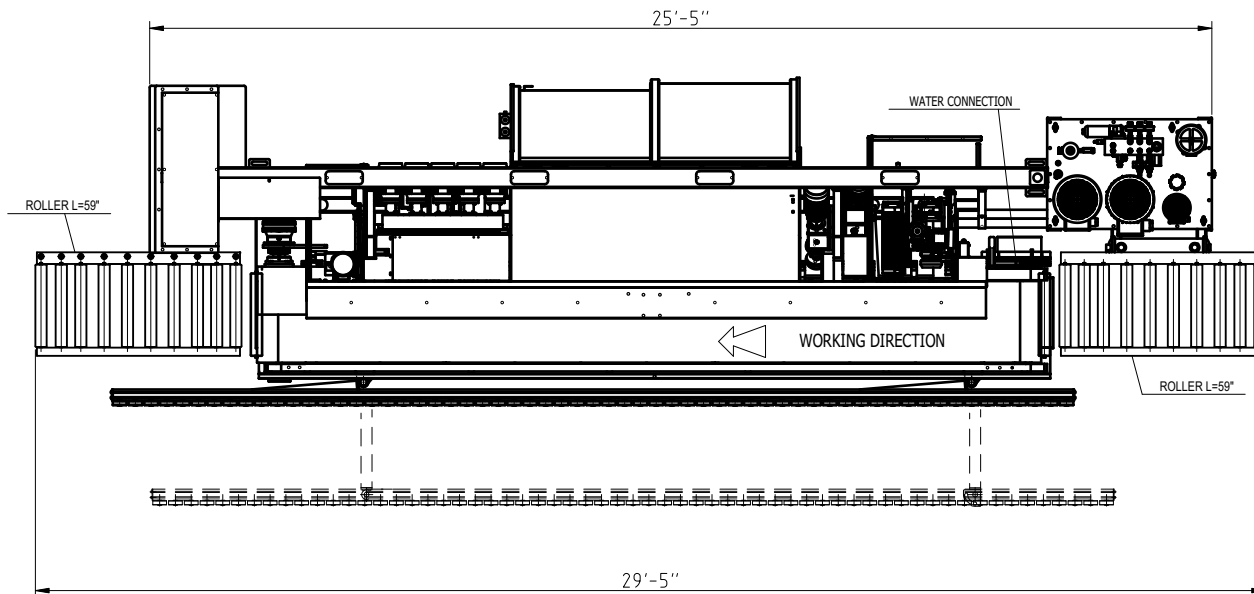

VERSIONI ADAT: Nuovo Disegno		Tolleranze generali (dove non indicato):	
00		js13 - lineari	H13 - Fori
A termini di legge è vietato riprodurre o comunicare a terzi il contenuto del presente disegno.		30° - angolari	h13 - Alberi
		0,3x45° - smussi	
Materiale:	N°Pezzi:	Scala: 1:20	Disegnatore: Tizzoni
Tattamento:	MACCHINA TIPO: OMEGA PENCIL SHORT	Data: 07/04/2022	
GRUPPO: COMANDULLI		Controllato: DIS.N°	
PARTICOLARE: LAYOUT OMEGA PENC.SHORT DX		MAC3540/A	